

Perimeter Light (Art.253-11, Art.253-12, Art.253-03)

Perimeter Lights for basketball backboards

Diese Seite ist in Englisch und Italienisch nur verfügbar. Es folgt der Version Englisch.

Available in 3 versions:

Art.253-11


KIT of Perimeter Light with Control Unit

Art.253-12

Control Unit (without KIT Perimeter Light)

Art.253-03

KIT Perimeter Light (without Control Unit)

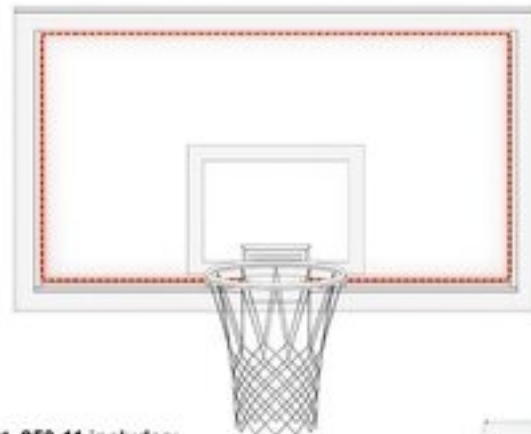

Art. 253-11 includes:




Artikelnummern und preise (zzgl. MwSt.)



Art.253-11 **EUR 470.00**
...#KIT of Perimeter Light and Control Unit
 Abmessungen: LEDstrip=515cm ,
 BOX=20x15x8cm. - Gewicht: 5.0kg.



Art.253-12 **EUR 270.00**
...#Control Unit (for Perimeter Light not provided)
 Abmessungen: BOX=20x15x8cm. - Gewicht: 1.0kg.



Art.253-03 **EUR 196.00**
...#Perimeter Light (without Control Unit)
 Abmessungen: LEDstrip =515cm. - Gewicht: 4.4kg.

Art.253-11

KIT of Perimeter Light with Control Unit ([picture](#))

The control signal for activating the perimeter light comes from the serial data cable used for the series FS and FC scoreboards, for example the 24-seconds shot clocks [FS-24s-1](#), [FS-24s-3](#), [FS-24s-4](#), [FS-24s-H20](#).

The Perimeter Light operating modes are programmable in the Command Console ([Console-700](#), art.308-01):

- (a) the duration of the lighting at the end of every game period,
- (b) the lighting at the end of the ball possession period (shot clock),
- (c) eventual flashing.

For basketball courts, two of these items are required (one for each basketball backboard).

The KIT includes:

- Perimeter light with an 1.7m long cable to be connected to the Control Unit.
- Fastening brackets for the perimeter light suitable for the majority of Basketball backboards.
- Control Unit, ready to be connected to the serial data cable of the FS and FC scoreboards, from which it receives the information for the activation of the Perimeter Light.
- One RJ-45 3-way coupler for the serial data cable.
- Connecting cables between the Control Unit and the serial data cable that attaches to the 24-second shot clock.

Features:

- Power supply: 100-240V, 0.35A, 50-60Hz. The type of plug can be chosen upon purchase.
- Weight (Perimeter Light + Control Unit + Brackets): 5kg.

Art.253-12

Control Unit (without KIT of Perimeter Light) ([picture](#))

This Control Unit is used when you already have a perimeter light of another manufacturer but wish to install FS or FC series scoreboards, for example the 24-second shot clock models [FS-24s-1](#), [FS-24s-3](#), [FS-24s-4](#), [FS-24s-H20](#).

The control signal for activating the perimeter light comes from the serial data cable used for the series FS and FC scoreboards. The Control Unit provides a relay contact (without electrical power) to drive the Perimeter Light of a different manufacturer.

The Perimeter Light operating modes are programmable in the Command Console ([Console-700](#), art.308-01):

- (a) the duration of the lighting at the end of every game period,
- (b) the lighting at the end of the ball possession period (shot clock),
- (c) eventual flashing.

For basketball courts, two of these items are needed (one for each basketball backboard).

Includes:

- Control Unit, ready to be connected to the serial data cable of the FS and FC scoreboards.
- One RJ-45 3-way coupler for the serial data cable.
- Connecting cables between the Control Unit and the serial data cable that attaches to the 24-second shot clock.

Features:

- Power supply: 100-240V, 0.35A, 50-60Hz. The type of plug can be chosen upon purchase.
- Relay output: clean contact, normally open (NO), max 230VAC, 5A.
- Dimensions and Weight: 198x148x76mm, 1kg.

Art.253-03

KIT of Perimeter Light (without Power Unit) ([picture](#))

This item is used when you want to install a Favero Perimeter Light on systems with scoreboards made by other manufacturers. In any case, such systems must provide a relay contact (normally open) to drive the activation of the Favero Perimeter Light.

For basketball courts, two of these items are needed (one for each basketball backboard).

Includes:

- Perimeter Light (without Control Unit) and its power supply with 230V input.
- Fastening brackets for the perimeter light suitable for the majority of basketball backboards.

Features:

- Power supply: 230V 0.12A 50Hz. The type of plug is Schuko.
- Weight (Perimeter Light + Power supply + Brackets): 4kg.

Perimeter Light Features

- **Compliant with FIBA regulations.**
- **Flexible** and applicable to all types of Basketball backboards.
- **Length:** 5.15m in a single piece. Junction connectors are not necessary.
- **Power supply:** 12VDC, 1.0A.

Other Features

- **Warranty:** 2 years ([info](#)).